



Replacement Parts for * Hydraulic Hose

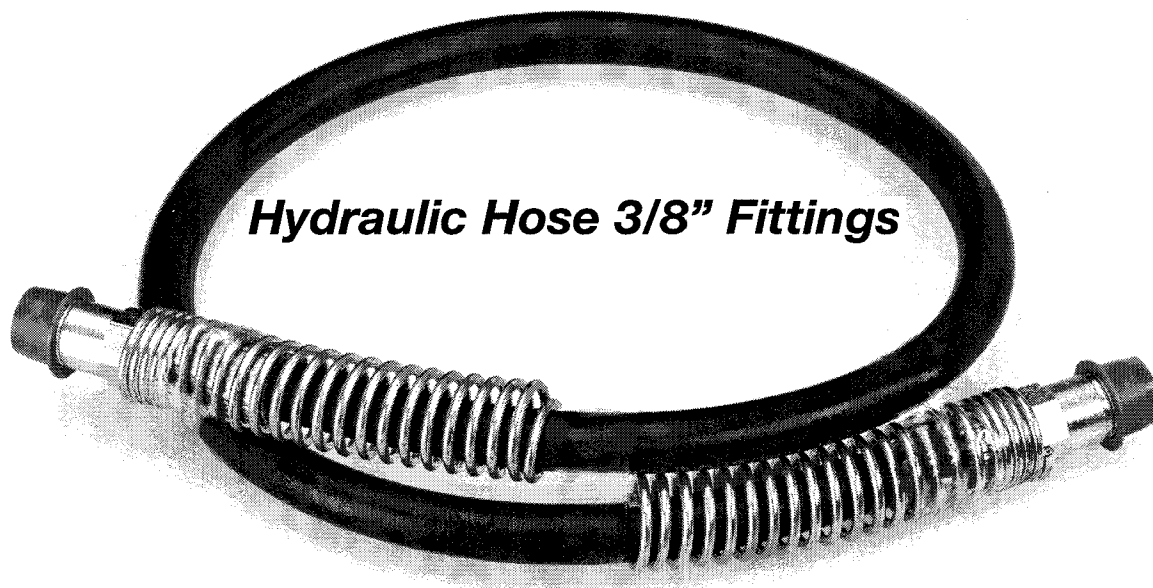

J2AT 2-Wire Braid Jack Hose

Hose Catalog description	Product No.	Hose I.D. (in.)	Hose O.D. (in.)	Rated Working Pressure (psi)	Min. Burst Pressure (psi)	Min. Bend Radius (in.)	Wt. Per 100Ft. (lbs.)	Pc Ferrule Catalog Description
4J2AT	4657-1400	1/4	.58	*10,000	*20,000	4	23	4PC1FS/ 4PC2F



No skiving required for 4PC1FS Ferrule

Recommended For: Hydraulic jack applications. Meets Material Handling Institute Specification IJ 100 for Hydraulic Hose and Hose Assemblies used with Jacking Systems. Tube: Type C (Nitrile), Black, Oil resistant synthetic rubber.

Reinforcement: Two braids of high tensile steel wire. **Cover:** Type C2 (modified Nitrile), Black, Oil and abrasion resistant thin synthetic rubber.

Temperature Range: - 40 F to + 120 F (- 40 C to + 49 C)